


# VCT

450/750 V. 70°C FLEXIBLE CONDUCTOR  
PVC INSULATED AND SHEATHED, 4 CORES

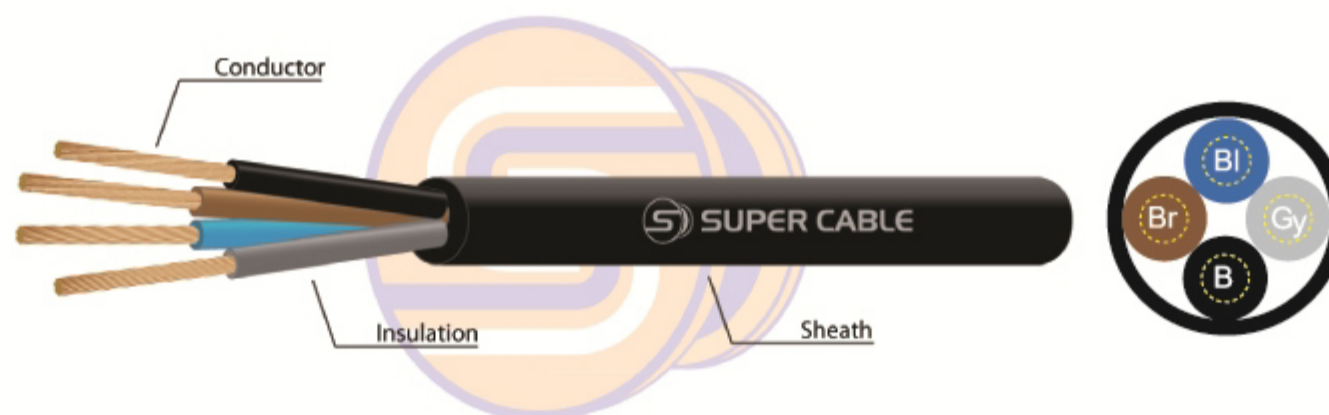

## APPLICATION

- Use for general purpose
- Use for connecting electric appliance
- Laid on cable trays
- install in duct in ground or direct burial in ground

TESTING VOLTAGE : 2,500 Volts

REFERENCE STANDARD :

TIS 11-2553 PART 101, TABLE 7

## CABLE STRUCTURE

CONDUCTOR : Flexible Annealed Copper

CLASS 5 Size 4 - 35 mm<sup>2</sup>

INSULATION : Polyvinyl chloride type PVC/D

SHEATHED : Polyvinyl chloride type PVC/ST5

## CLASSIFICATION

Maximum Conductor Temperature : 70°C

Circuit Voltage does not exceed

450/750 Volts (U<sub>0</sub>/U)

450 Volts between Line to Earth (U<sub>0</sub>)

750 Volts between Line to Line (U)

## Technical Data



TIS 11-2553 PART 101, TABLE 7

Nominal cross sectional area	Conductor type	Number of wires	Diameter of wires	Diameter (approx.)	Nominal insulation thickness	Nominal sheathed thickness	Overall diameter (approx.)	Maximum conductor resistance at 20°C	Minimum insulation resistance at 70°C	Current rating in free air	Cable weight (approx.)	Standard packing
mm <sup>2</sup>	Class	No.	mm	mm	mm	mm	mm	Ω/km	MΩ-km	A	kg/km	m
4	5	56	0.31	2.59	0.9	1.8	17.0	4.95	0.0084	26	350	100/C
6	5	84	0.31	3.59	0.9	2.0	19.5	3.30	0.0071	34	490	100/C
10	5	80	0.41	4.67	1.1	2.2	24.0	1.91	0.0068	47	800	1,000/D
16	5	126	0.41	5.86	1.1	2.6	28.0	1.21	0.0050	63	1,100	1,000/D
25	5	196	0.41	7.31	1.3	2.8	33.0	0.780	0.0048	83	1,700	1,000/D
35	5	276	0.41	8.67	1.3	3.1	37.0	0.554	0.0041	102	2,200	1,000/D

Conductor Class 5 : Flexible

C : Packing in coil

D : Packing in drum

Core Color : Blue, Brown, Black, Grey

การใช้งาน

- ใช้งานทั่วไป
- ใช้ต่อเข้าเครื่องใช้ไฟฟ้า
- วางบนรางเคเบิล
- รอยต่อฝังดินหรือฝังดินโดยตรง